



Ei2300 Monitoring System

Siloxanes

Complex and varying gas matrices make siloxanes difficult and expensive to measure. The Ei2300 Siloxane Monitoring System is an independent and fully automated measurement system developed to precisely quantify the concentration of siloxanes in biogas. The instrument separates compounds in two separate stages, combining the selectivity of a Gas Chromatograph (GC) with the extraordinary sensitivity (low ppbv) of an Ion Mobility Spectrometer (IMS), and is now supported by ASTM Standard D8455.

Applications

- Biogas
- Dairy, Hog and Pig Farms
- Gaseous Fuels
- Landfills
- Wastewater Treatment Plants
- Food Waste Digesters (co-digestion)
- Others

Available Configurations

- Tabletop
- Rack-Mounted
- Commercial and Industrial Enclosure
 - NEMA 4/IP66 Rated
 - Table and Wall Mountable
 - Window to View LCD Screen
 - Full Remote Access
 - Secure Enclosure
 - Integrated, Heated Sampling System
 - Heated Sample Line
 - Options
 - Hazardous Rated Enclosure (Class 1, Division 2)
 - Side Mounted Air Conditioning Unit
 - Remote Access Hardware



Supported by Standard D8455



Supported by Standard
2613-2:2023






Key Features

- Precise Measurements
- Easy to Operate
- No Analytical Specialist Needed
- Two-fold Matrix Separation
 - Gas Chromatograph
 - Ion Mobility Spectrometer

Ohio Lumex Proprietary Calibration Procedure Limits of Quantification (LOQ) [1mL Loop]		
Species	Silicon (Si) (mg/m ³)	Silicon (Si) (ppb)
(TMSOL) Trimethylsilanol	0.006	1.6
(L2) Hexamethyldisiloxane	0.007	1.0
(L3) Octamethyltrisiloxane	0.007	0.7
(L4) Decamethyltetrasiloxane	0.007	0.5
(D3) Hexamethylcyclotrisiloxane	0.008	0.9
(D4) Octamethylcyclo-tetrasiloxane	0.008	0.7
(D5) Decamethylcyclo-pentasiloxane	0.008	0.5
(L5) Dodecamethylpentasiloxane	0.018	1.1
(D6) Dodecamethylcyclohexasiloxane	0.019	1.0

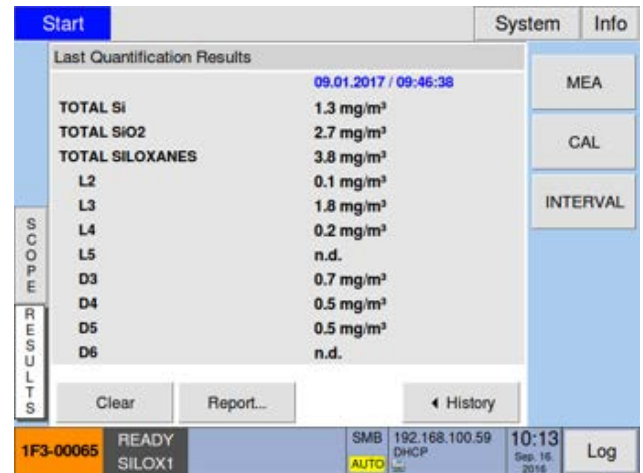

The screenshot shows the 'Last Quantification Results' screen. It displays a list of components and their concentrations in mg/m³ and ppb. The components include TOTAL Si, TOTAL SiO2, TOTAL SILOXANES, and individual siloxane species (L2, L3, L4, L5, D3, D4, D5, D6). The interface also includes a 'SCOPE' section on the left, a 'RESULTS' section on the right, and a status bar at the bottom with fields for sample ID (1F3-00065), instrument status (READY SILOX1), and system parameters (SMB, DHCP, IP: 192.168.100.59, Date: 10:13 Sep. 16, 2018).

Technical Specifications			
Separation I	GC Retention Time	Purge Gas Requirement	Nitrogen: Quantity 5.0 (cylinder or generator)
Gas Chromatograph (GC)	Isotherm (< 80° C)	Operation	Manual: 6.4" TFT touchscreen Online Remote Test: User defined intervals
Capillary Column	30m	Data Storage (Internal)	16 GB Flash Memory
Separation II	Drift Time Ion Mobility Spectrometer (TOF-IMS)	Data Output	USB, 4-20mA, MODBUS (TCP)
Ionization	β-radiation - ³ H	Ambient Temperature	Operation 0 - 40° C
Activity	300 MBq, below the exemption limit of 1 GBq acc. To EURATOM guideline	Moisture	Up to 95% non-condensing
Detection	Electrometer, Ion Mobility Spectrometer	Power Range	100 – 240 VAC, 50 – 60 Hz
LoD for Siloxanes	One digit ppb	Power Consumption	< 200 Watt
Typical Range for Siloxanes	0 – 1.5 mg/m ³	Weight	34 lbs (15.5 kg)
Pneumatics	Two Electronic Pressure Controllers (EPC) for flow stability and GC ramping	Dimensions	17.7 x 17.1 x 7 in (No Case) 449 x 435 x 177 mm (No Case)
Sampling	Ambient pressure, Firmware controlled pump plus heated electrical six port valve, Liquid trap (water condensation) optional	Housing	19"; IP 20 Enclosure, CE Marking

GC-IMS Supplied By:

